

# VERTICAL FLOOR-STANDING DIGITAL SIGNAGE DISPLAY

FLR 101 Rotatable Series 43", 49", 55" inch Super Slim



HD IPS Screen



Android OS



Touch screen (optional)



Bluetooth



WiFi



178 Viewing angles



3G/4G (optional)



Camera (optional)



### **Ultra-thin Structure**

Stylish IPAD Style classic appearance with aluminum frame enclosed and built-in tempered glass. It's true thickness is only 45mm.

### **Full HD Stable Display**

High quality 1920 x 1080 resolution ultra clear LCD Screen high brightness and superior color rendering.

### **Supports Android/Windows/Linux System**

Support a variety of Android/Windows/Linux devices remote control, edit content synchronization. Update, expand business opportunities. However, our default and preferred OS is Android.

### **Supports LAN or WAN Digital Signage Content Management Software**

Use Free software or simple deployment or upgrade to cloud server-based system for more complicated and advanced feature digital signage system

### **Diverse Customization**

Diverse Customization: Single version / network version ( LAN / WIFI / 3G / 4G ) / touch version, camera / IR / sensing / bluetooth / interactive touch screen and other expansion capabilities, all can be customized according to customer's specific requirements such as adding corporate logo and color.


### **Optional Touchscreen**

This IPAD Series design offers Projected Capacitive Touch (PCAP) or Touch Foil touchscreen technology for seamless design. IR technology is not applicable in this design.


# SPECIFICATIONS



Technical Parameter for LCD Panel	Panel Size	43", 49, 55" real color LCD screen
	Aspect Ratio	16:9
	Active Area	1429.7mm(H) x 803.8mm(V)
	Max. Resolution	1920x 1080
	Dot Pitch	0.74mm(H) x 0.74mm(W)
	Number of Color	16.7M
	Brightness	450cd/m2
	Contrast Ratio	3000:1
	Responsive Time	5ms
	Panel Life	above 50000 hours
	Touch Technology	Optional. Capacitive or Touchfoil
Media Player	OS	Android 5.1
	CPU	RK3188, eight-core ARM Cortex A7 2.0 GHz Upgradeable to RK3288 or RK3366
	GPU	ARM Mail-764
	RAM	DDR 1GB (Upgradable to 4GB)
	Built-in storage capacity	8GB (Upgradable to 64GB)
	WIFI	WIFI module+WIFI Antenna
Supported files	Video formats	MP4(AVI:DIVX/XVID),MPG2(DVD:VOB/MPG2), MPEG1 (VCD: DAT/MPG1)
	Audio formats	MP3
	Photo formats	JPG
	Scrolling Text	ROL(UNICODE)
	Input/output interface	USB,RJ45
Main Hardware	Shell Material	Metal shell + Aluminum Alloy frame + toughened glass
	Surface	Metal case with powder burning; Tempered glass to protect LCD panel
	Speaker	2*10W built-in stereo speakers
	Heat Dispersion	Built-in DC fans
Power	Standby	≤3W
	Working	30W-180W
	Power supply	AC 110V - 240V, 50/60HZ
Temperature	Storage	-7 to 65 Celsius degree
	Normal Working	-5 to 65 Celsius degree
OSD Language	English, Chinese, French, German, Italian, Spanish, Arabic	

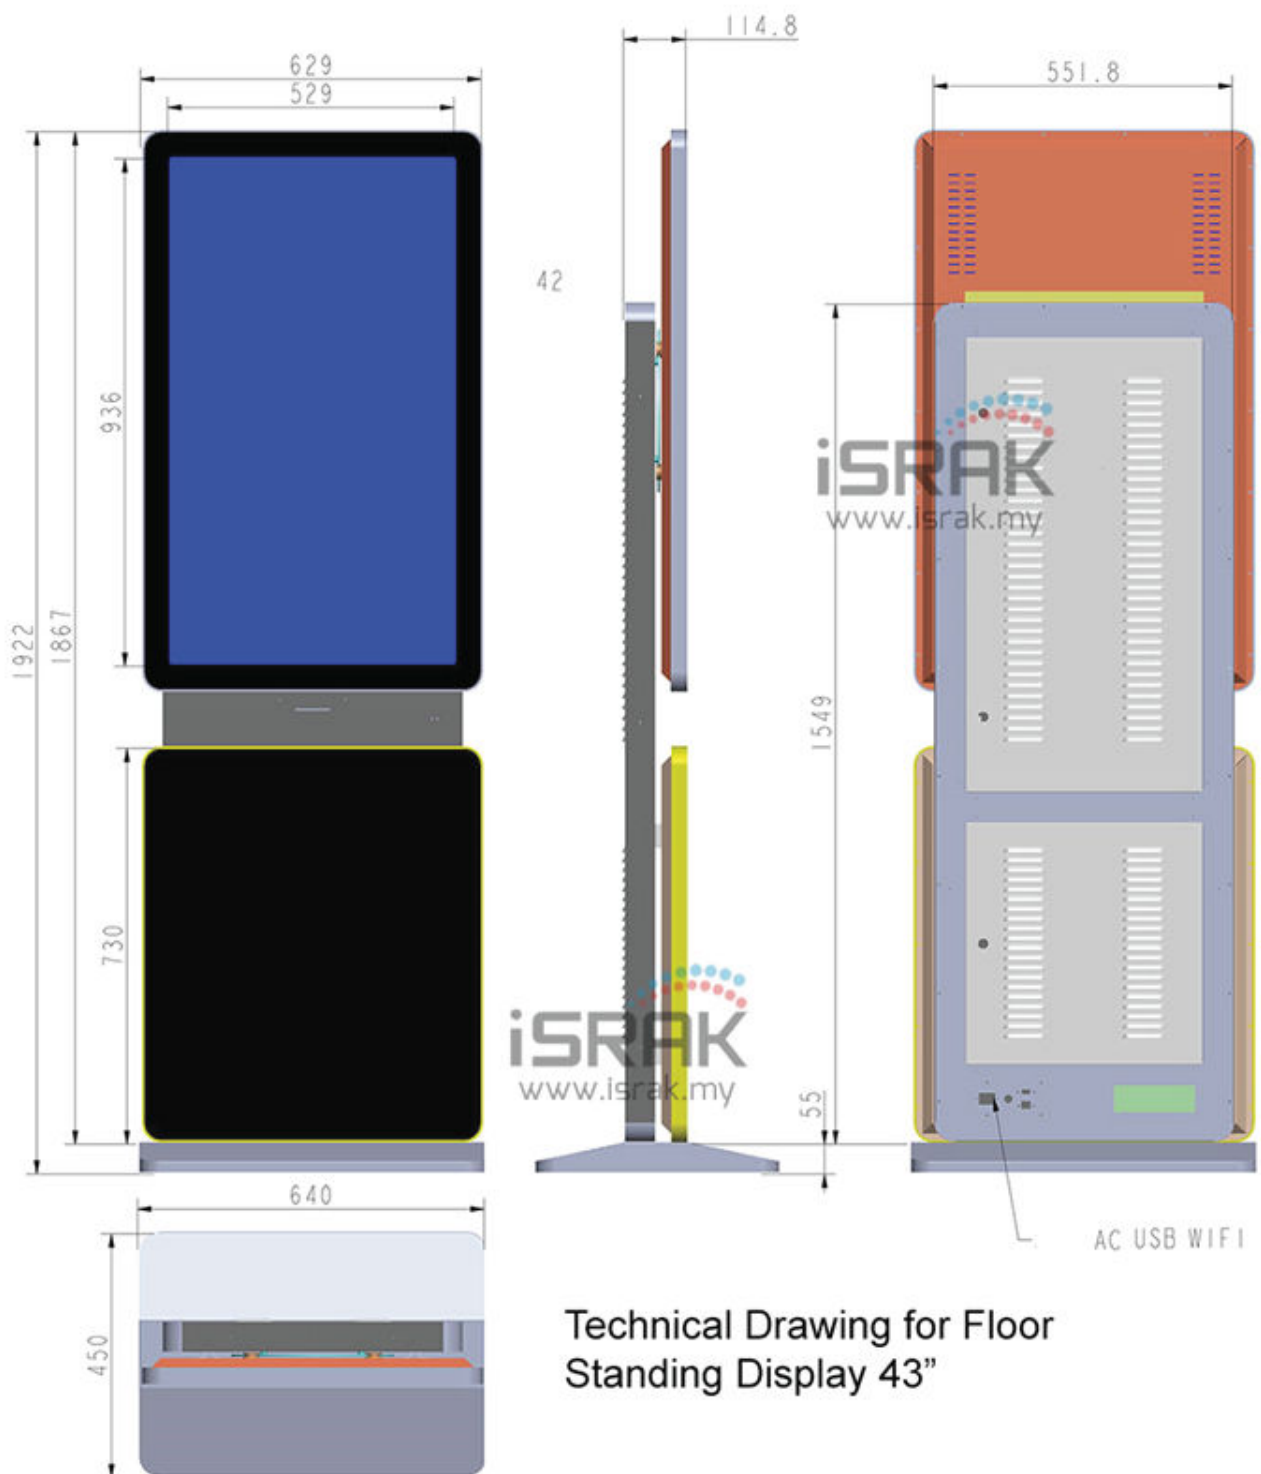


Technical Drawing for Floor Standing Display 43"

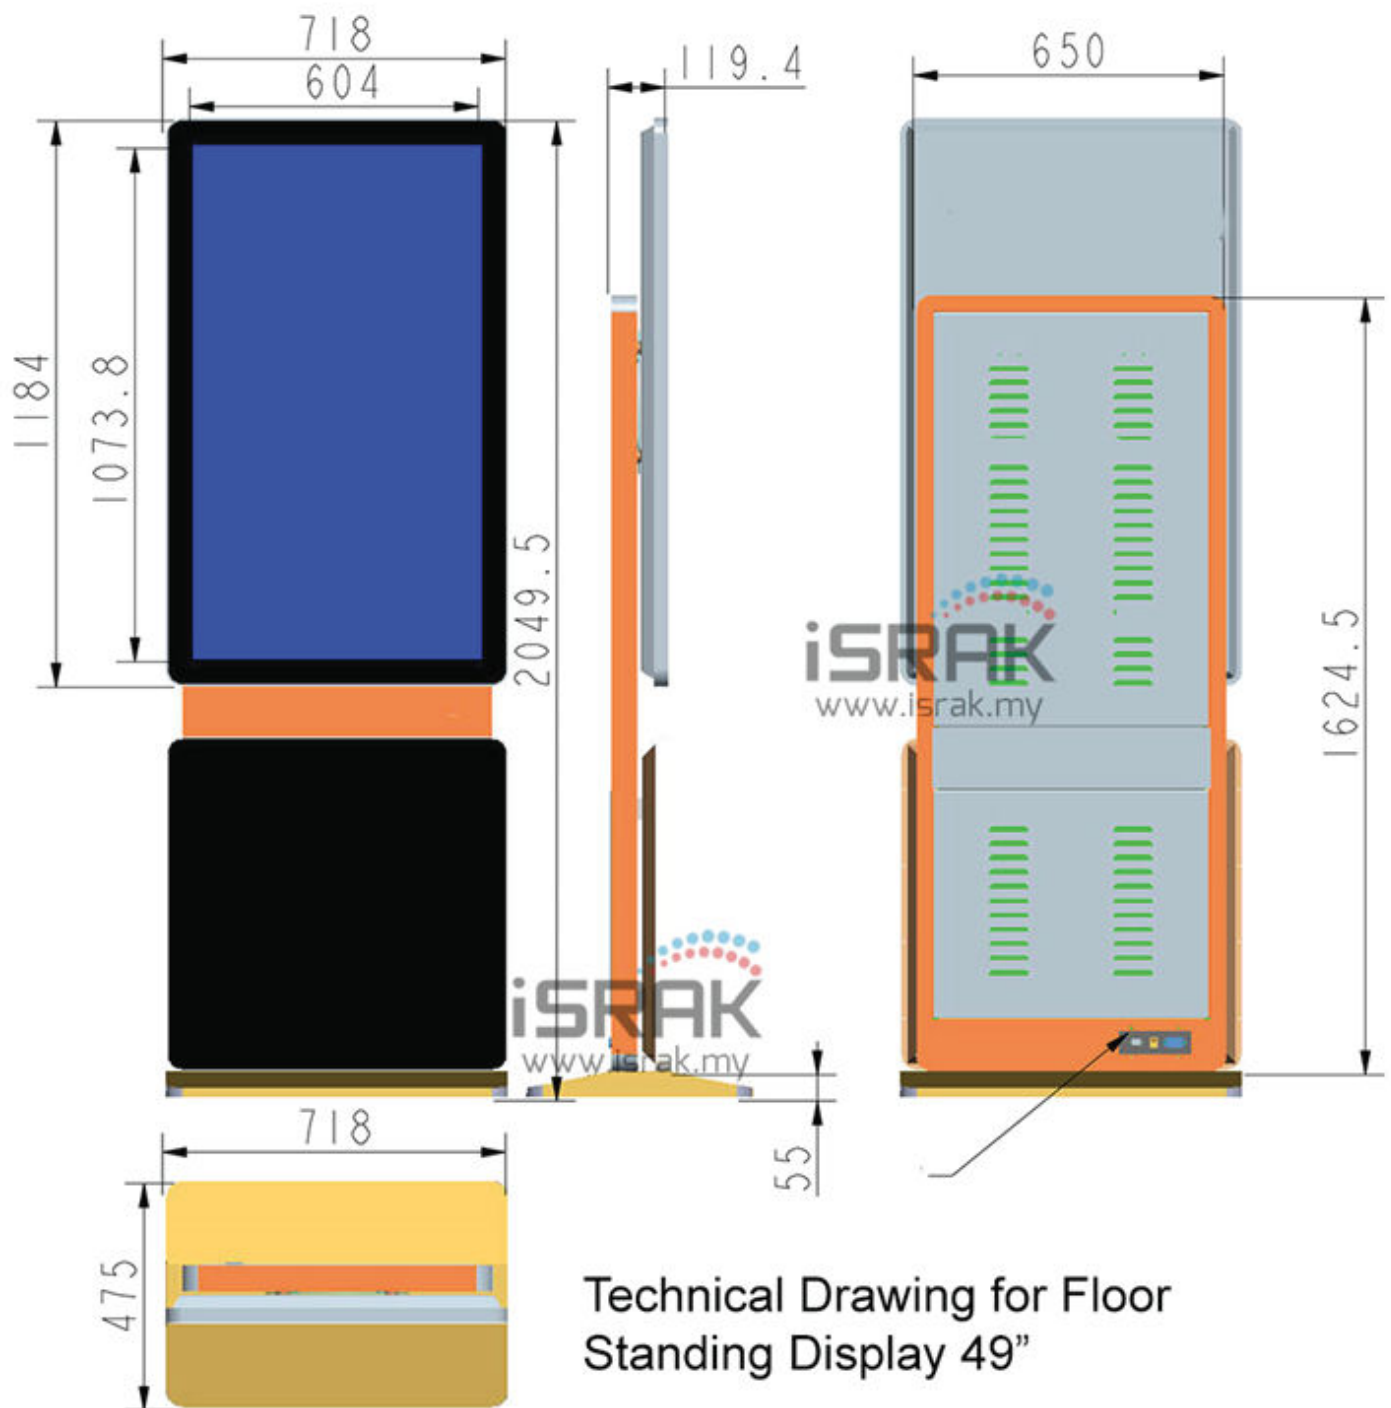

Technical Drawing for Floor Standing Display 49"



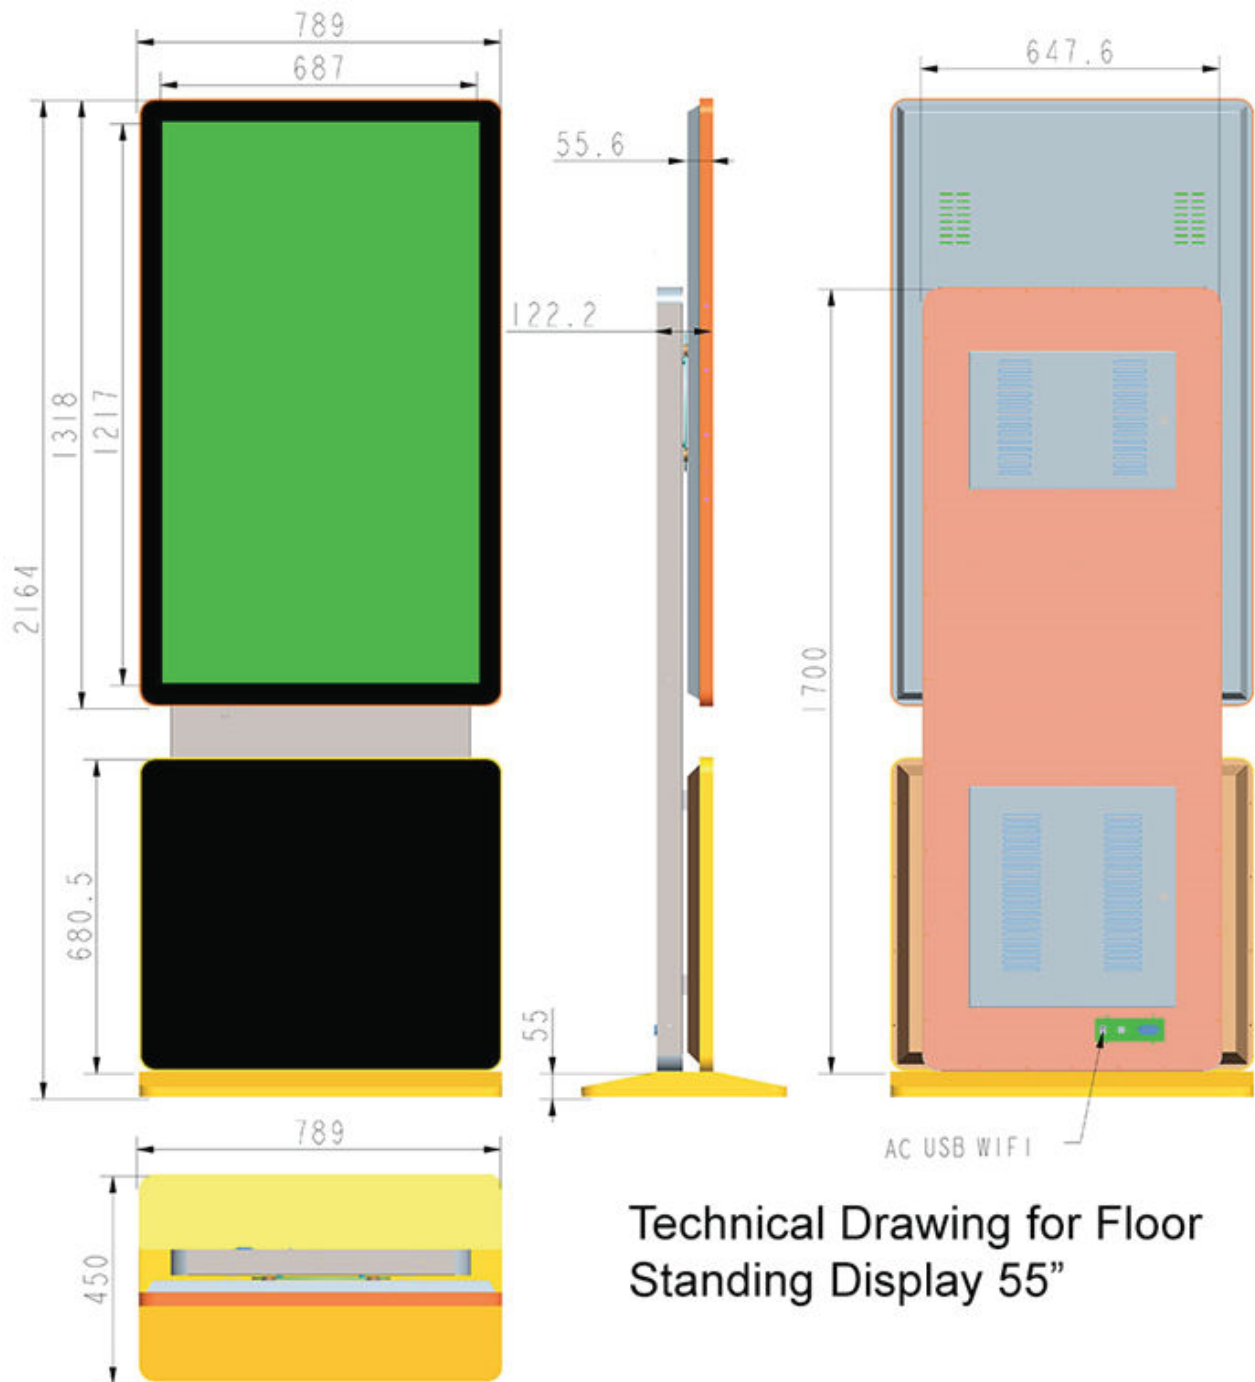

Technical Drawing for Floor Standing Display 55"